

PAS 300HF 440 FVL06 CNP

Diesel - Qmax 2,160 m³/h (9,510 USgpm) - Hmax 71 m (233 ft)



PAS HF - Vacuum prime centrifugal pumps

The pump system consists of a centrifugal pump and a separator, which enables air to be separated from the liquid and be sucked by a vacuum pump - making automatic priming possible. Even with suction heights of several meters the machine rapidly evacuates the air from the suction pipe and starts to pump. Additionally, thanks to the semi-open impeller, the PAS HF range is also suitable for pumping liquids with solids in suspension.

Applications

Both Atlas Copco and Varisco have decades of experience in designing and producing pumps. We have put those years of expertise into providing solutions that work across multiple applications. The PAS HF (high flow) range is packed with features that not only meet, but exceed the needs of the market. We are focused on an efficient, extremely versatile pump that is suitable for many industries, including construction, general dewatering and emergency applications, such as flood clean up.

Benefits

Pump

High efficiency: 72% (B.E.P.)

Rapid "dry" priming

Up to a height of 7,5 m (24.6 ft)

High resistance

To abrasive liquids and turbid sandy waters

Semi-open impeller

Solids handling up to 89 mm (3.5")

Diaphragm vacuum pump

Oil free suitable for dry running: no contamination of the environment

Mechanical shaft seal in oil bath

It allows the "dry running" operation of the pump

PAS 300HF 440 FVL06 CNP

Performance curves


Test according to UNI EN ISO 9906 standard - level 2

Test liquid: clean water, density 1,000 kg/m³

Losses from priming system and check valve not included

Spherical solids handling: D.89 mm (3.5")

Max absorbed power: 195,0 kW - 261.5 HP (1.600 rpm)

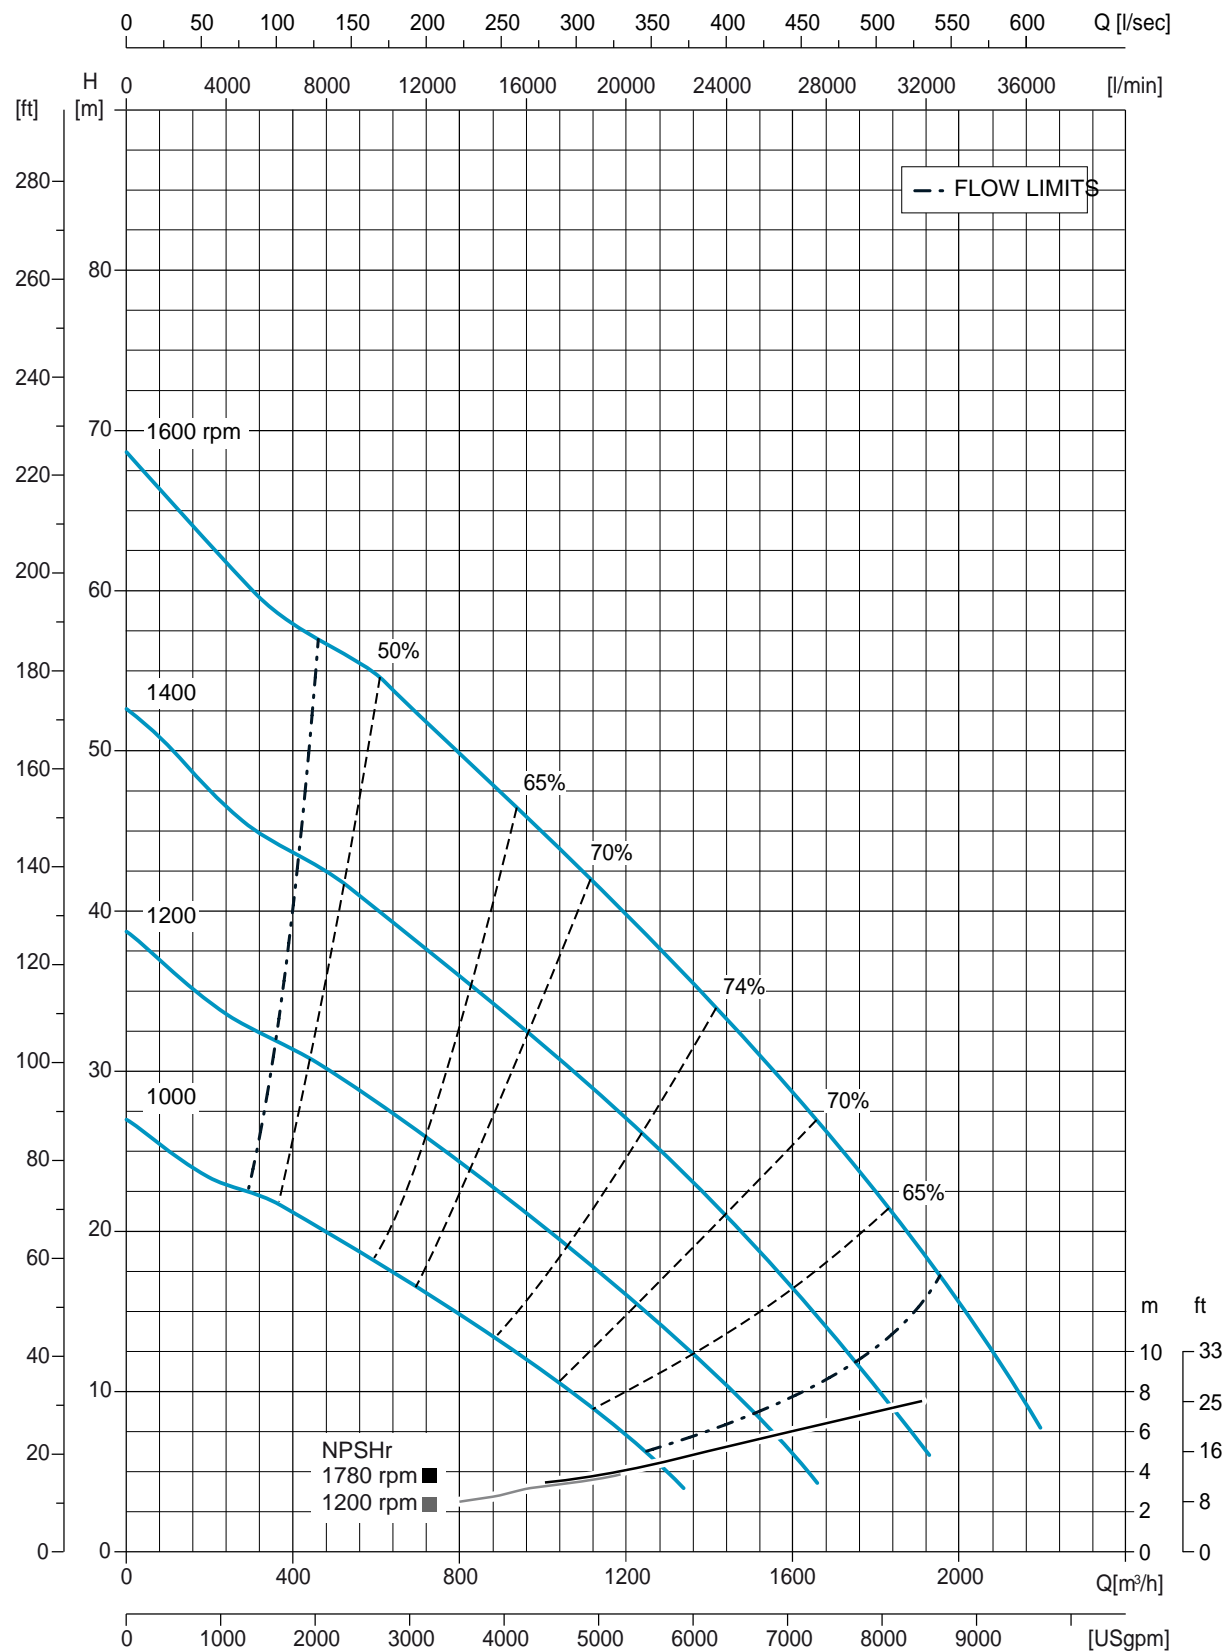

PAS 300HF 440 FVL06 CNP

Technical data

Pump

Model	PAS 300HF
Qmax	2.160 m ³ /h - 36.000 l/min (9,500 USgpm)
Hmax	71 m (233 ft)
Q max eff.	1.580 m ³ /h - 26.330 l/min (7,000 USgpm)
Eff. max	72 %
Suction port	Flanged - DIN 300
Delivery port	Flanged - DIN 300
Impeller type	Semi-Open, 2 vane
Solids handling	89 mm (3.5 ")
Material	G11
Casing	ASTM A536 ductile iron
Impeller	ASTM A536 ductile iron
Wear plates	ASTM A48 Class 20 cast iron
Number of plates	1
Shaft	AISI 630 stainless steel
Mechanical seal	Silicon carbide / Tungsten carbide
Elastomers	VITON

Priming system

Vacuum pump	V22
Vacuum pump type	Diaphragm
Nominal air capacity	85 m ³ /h (50.0 cfm)
Max vacuum	0,9 bar
Separator type	-
Separator material	EN-GJL-200 cast iron
Drives	Link belt

Engines

Make	Volvo			
Model	TAD872VE (VL06)			
Type	Diesel turbo common rail			
Displacement	7.700 cm ³ (470 in ³)			
No. cylinders	6			
Cooling	Liquid with radiator			
Rpm type	Variable			
Standard speed	1.600 rpm			
EU emissions	2002/88/CE Stage IV			
US emissions	EPA Tier 4 final			
Starting	Electric			
Starting voltage	24 V			
Emissions reduction technology	DOC + SCR			
Speed [rpm]	1000	1200	1400	1600
Consumption [l/h]	25,1	35,4	42,8	51,7
Power [kW]	112,8	155,1	183,3	206,8
Power [HP]	151.3	208	245.8	277.3

Control panel

Model	PW750 (PW1)
	Manual operation
	Automatic operation: start-stop with transducers or floats
	Digital display with 8 languages (EN, SV, FR, DE, ES, IT, PT, NL) with:
	Hour meter, Rev counter, Liquid temperature, Oil pressure
	Battery voltmeter, Fuel level (%), Urea level
	Engine control unit (ECU) commands shutdown, derating or running depending on operating anomalies
	Automatic engine shutdown in case of:
	- low oil pressure
	- water overheating
	- low battery voltage
	(engine failure alarms with LED lights and display message)
	Service time (hours)
	Emergency stop button
	Push-button accelerator (up/down)
	(PW1 FleetLink control as option)

PAS 300HF 440 FVL06 CNP

Arrangements

Technical data	
Material	S235JR EN 10025-2 carbon steel
Coatings	Polyester powder, average thickness of 80 µm
Color	Yellow and grey Atlas Copco (standard)
Features	Painted steel base. Stackable frame
Battery	Acid charge Pb-Ca maintenance free 2x(12 V - 160 Ah - 680 A)
Tank	450 l (118.9 USG)
Drip pan	495,0 l (130.8 USG) (110% of the total volume of the tank)
Emergency stop	Inside the canopy
Locking keys	Control panel door and canopy doors

CNP PAS 300HF



Dimensions	2200 x 3900 x 2000 mm 87 x 154 x 79 "
H suction port	0,81 m (2.7 ft)
Dry weight (VL06)	4300 kg (9,480 lb)
Noise level	69-74 dB(A) @10 m (32 ft)